



DC power supply unregulated for 400VAC input voltage type PS2U250

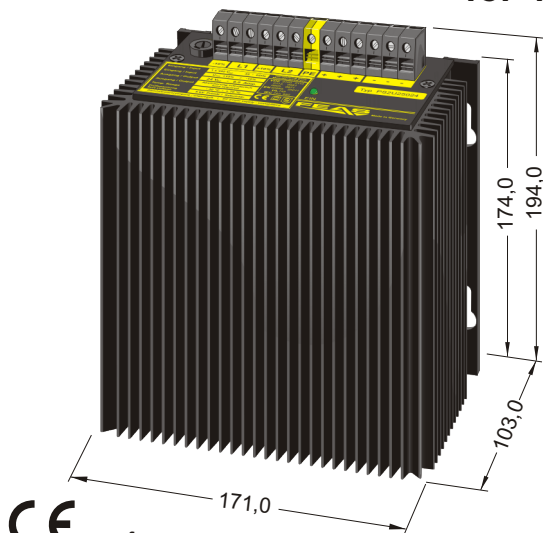

CE - conform

- Output separated according to VDE 0551
- Extra low safety potential PELV (EN 60204), SELV (EN 60950)
- Parallel connection possible
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL, CSA

Load current diagram
at nominal input voltage

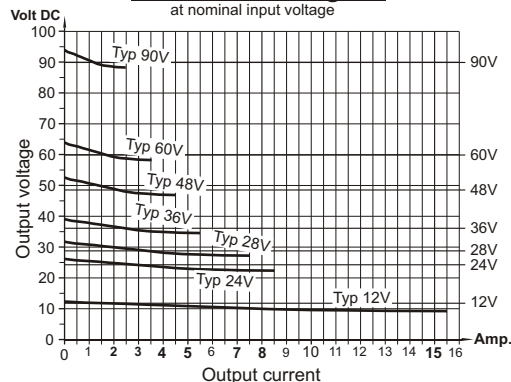

Technical data

Input data		
Input voltage AC	400VAC	45 - 66 Hz
Input voltage tolerance	-10% to +15%	
Input current at nominal load	at 400VAC max. 0,55A	
Protective circuit	-	
Hold-up time	20 mSek. typ.	

Output data	
Output voltage $U_{Nominal}$	see table below
Output current $I_{Nominal}$	see table below
Current limiting	-
Residual ripple (100Hz)	< 2%

Control data	
Control deviation load	-
Control deviation supply	-
Control time	-

Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	-
Storage temperature range	-30°C...+105°C
Cooling	selfcooling
	recommended respective distance 15mm each

Safety devices	
Fuse for input	2,5A delayed, integrated into the device
Fuse for output	in dependency of nominal output current
Overload protection	-
MTBF	>400.000 h

Safety data	
Test voltage transformer	5 kVac in accordance to VDE 0551
High voltage resistance	Primary circuit - secondary circuit 3,75 kVac acc. to VDE 0806 / IEC 380
Degree of EMI suppresion	< K acc. to VDE 0875 and VDE 0877
Protection class	Class 1 with PE-Connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical ambient
Protective class enclosure	IP 65
Protective class terminals	IP 20 (VGB4)
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27

Applied construction regulations	
according to VDE	VDE 0100, 0110, 0113, 0551, 0160/W2, 0806
IEC	IEC 60950, IEC61000-6-1-2, IEC60068-2-3 IEC 60068-2-11-52, IEC 60529, IEC 380
EN	EN60950, EN50082-1 EN61000-6-1-2, EN50178, EN50204, EN61558-2-17 EN60204, EN60529, EN61000-4-2-3-4-5-6-8-11 EN60068-1, EN60068-2-1-2-3-6-27-30 EN45501, EN50021
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950

Mechanics	
Mounting	wall mounting with screws

Nominal output voltage	12,0V _{DC}	24,0V _{DC}	28,0V _{DC}	36,0V _{DC}	48,0V _{DC}	60,0V _{DC}	90,0V _{DC}
Range of adjustment output voltage	-10% und +10%	-10% und +10%	-10% und +10%	-10% und +10%	-10% und +10%	-10% und +10%	-10% und +10%
Type	PS2U25012	PS2U25024	PS2U25028	PS2U25036	PS2U25048	PS2U25060	PS2U25090
Nominal output current	15,0Amp.	8,0Amp.	7,0Amp.	5,0Amp.	4,0Amp.	3,0Amp.	2,0Amp.
Power	180Watt	192Watt	196Watt	180Watt	192Watt	180Watt	180Watt
Efficiency	90%	90%	90%	90%	90%	90%	90%
Dimensions (W x H x D)	171x194x103	171x194x103	171x194x103	171x194x103	171x194x103	171x194x103	171x194x103
Weight	approx. 6,55kg	approx. 6,55kg	approx. 6,55kg	approx. 6,55kg	approx. 6,55kg	approx. 6,55kg	approx. 6,55kg
Order-No.	58613	58625	58629	58637	58649	58661	58691